

Articulated Boom Lift

UpRight
POWERED ACCESS



- ☐ 17.2m max. working height
- ☐ 8.5m max. outreach
- ☐ 7.50m clearance height
- ☐ 1.2m, 140° jib
- ☐ 180° hydraulic powered platform rotation
- ☐ Driveable at full height
- ☐ Oscillating front axle
- ☐ 4 wheel drive


**AB50
JRT**

Courtesy of CraneMarket

AB50JRT boom lift specifications

	AB50JRT
max. working height	17.2m
max. platform height	15.2m
max. outreach	8.5m
max. clearance height	7.50m
platform capacity (SWL)	227kg
platform size	0.76m x 1.83m
platform rotation	180°
jib length	1.2m
jib working arc	140°
overall width	2.3m
overall length A	6.4m
stowed height B	2.1m
min. transport length	6.4m
gross weight	7,092kg
inside turning radius	2.3m
max. drive speed (lowered)	5.6kmh
ground clearance	250mm
gradeability	57%
tyres	12 x 16.5 loader lug poly filled
drive system	4 wheel drive
controls	joystick proportional drive, lift & slew/ rheostat other boom functions
power source	Kubota V-1505 water cooled diesel 29.5hp

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.

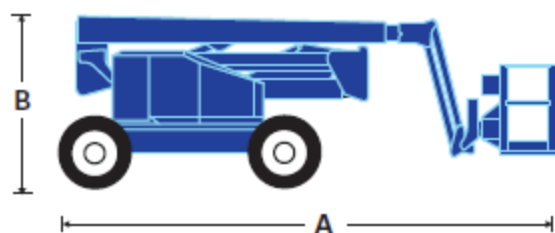

BPT - AB50JRT 8/07

UpRight
POWERED ACCESS

Vigo Centre, Birtley Road, Washington,
Tyne & Wear, NE38 9DA, U.K.

Sales Tel: +44 (0) 845 1550 057 • Spare Parts Tel: +44 (0) 845 1550 058


www.upright.com

standard features

- 1.2m, 140° jib
- Hydraulic powered platform rotation
- 4 wheel drive
- Front oscillating axle
- Proportional control of drive, boom lift and slew
- Foam filled lug tyres
- Driveable at full height
- Operator horn
- Extra finger protection handrail
- 1 year parts and labour warranty
- 5 year structural warranty

options

- Bumpguard system
- Platform control box cover
- Twin platform work lights
- Airline to platform
- Twin amber beacons on turntable
- Swing gate in lieu of drop bar
- Sand blast protection kit
- Cold weather start kit
- Drive motion alarm
- Towing package
- 2.44m x 0.76m aluminium platform 227kg SWL

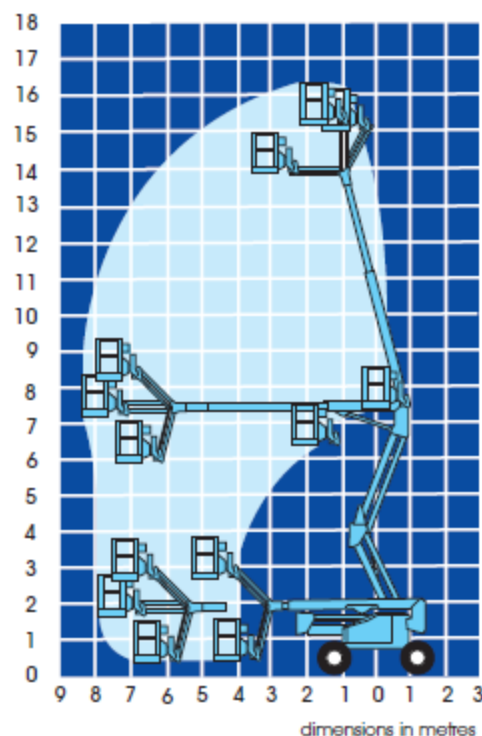

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight
POWERED ACCESS